


IKO Flat Grate Balcony Outlet

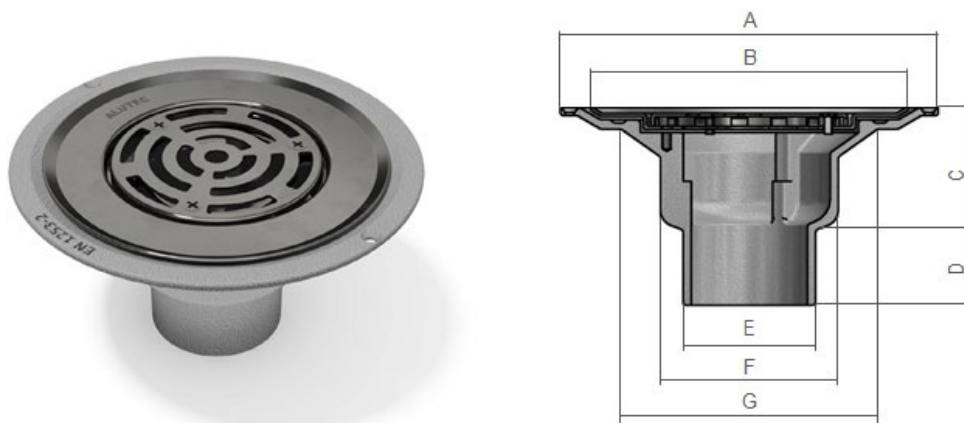

Part Code	Pipe connection size (O.D)	A	B	C	D	E	F	G	Max. Flow rate (l/s)
IKOABO1	76, 72x72, 82 and 110mm	234	196	77	45	82	110	158	4.7

*Flow rate measured at 35mm head of water.

PRODUCT INFORMATION

IKO Elite rainwater drainage outlets, together with ancillary components, are suitable for use with IKO hot melt, and reinforced bitumen membranes.

- All outlet components are manufactured from marine grade aluminium to give an extensive life expectancy of at least 50 years.
- To ensure ultimate reliability and confidence, the Elite outlet range has been rigorously tested to withstand water depths surpassing 1m.
- The Elite range incorporates PVCu pipe connectors, providing an air tight seal and thermal break between the outlet body and connecting pipework, preventing cold bridging.
- Our roof outlet range connects to all common PVCu, HDPE and socketless cast iron pipework sizes.
- Supplied threaded PVCu pipe connectors are manufactured from BS EN 1329 pipework and are therefore suitable for use with pipe wraps and fire collars.

MAINTENANCE

For optimum performance, roof outlets should be inspected and cleaned every six months to ensure peak operation.